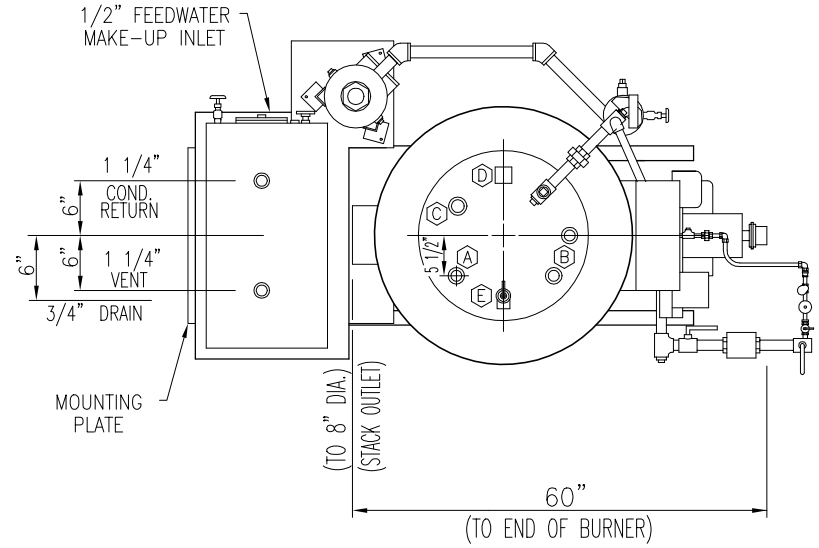

TOP VIEW

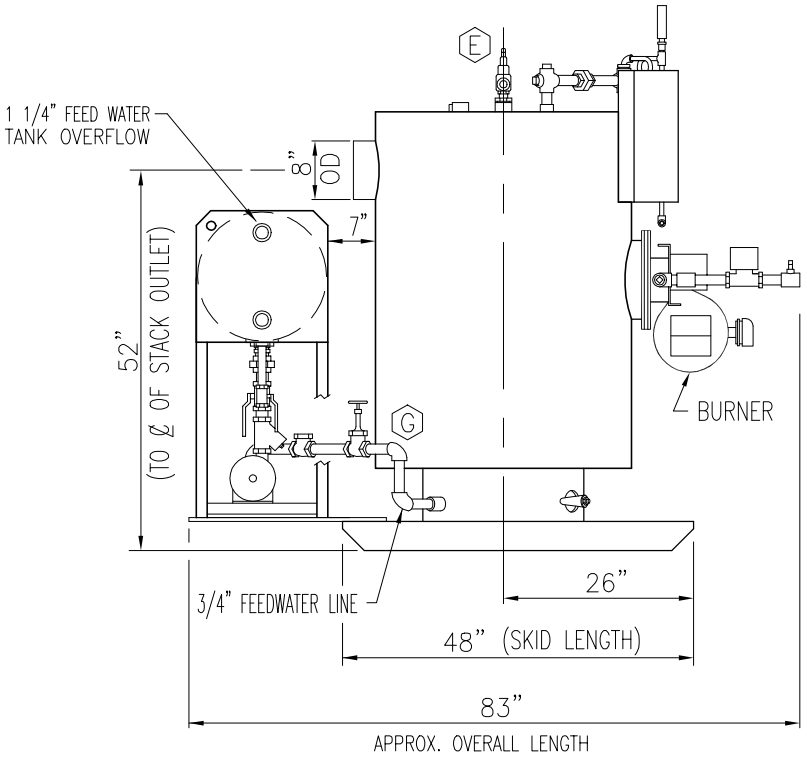

LEFT SIDE VIEW

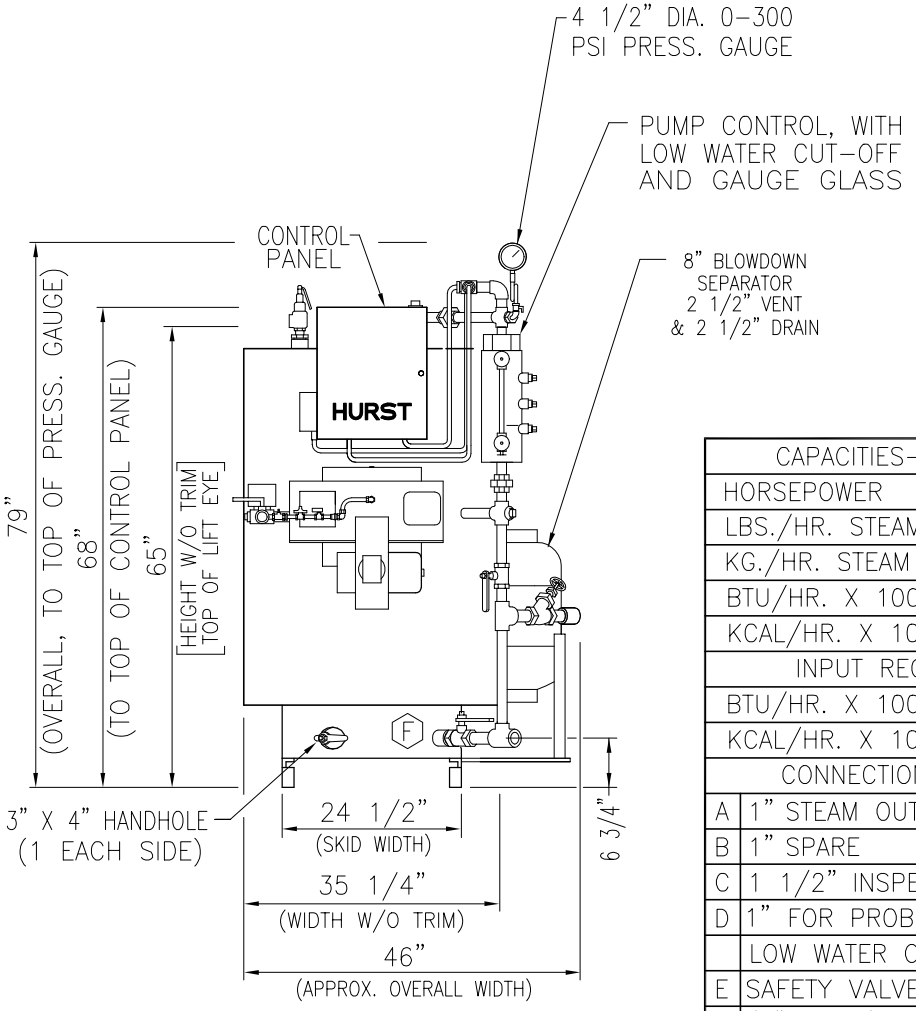

FRONT VIEW

CAPACITIES-OUTPUT	
HORSEPOWER	— 10
LBS./HR. STEAM	— 345
KG./HR. STEAM	— 156
BTU/HR. X 1000	— 335
KCAL/HR. X 1000	— 84
INPUT REQUIRED	
BTU/HR. X 1000	— 418
KCAL/HR. X 1000	— 105
CONNECTION SIZES	
A	1" STEAM OUTLET
B	1" SPARE
C	1 1/2" INSPECTION
D	1" FOR PROBE TYPE 2nd
	LOW WATER CUT-OFF
E	SAFETY VALVE, 1" OUTLET
	(1" CPLG.)
F	1" BLOWDOWN VALVE
G	3/4" FEEDWATER LINE
H	WATER CAP AT NWL - 48 GAL.
I	WATER CAP AT FLOODED - 62 GAL.
J	SHIPPING WEIGHT - 2250 LBS.

DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE.
CONSULT FACTORY FOR CERTIFIED DRAWINGS.

HURST BOILER & WELDING CO., INC.

10 HP - 4 PASS VERTICAL TUBELESS BOILER
WITH 30 GAL. BOILER FEEDWATER SYSTEM
& 8" DIA. x 26" BLOWDOWN SEPARATOR

150 PSI DESIGN PRESSURE

R	BY:	DATE:	CHK'D.	REASON FOR CHANGE

THIS DRAWING IS THE PROPERTY OF HURST BOILER AND WELDING CO., INC AND MAY NOT BE COPIED OR REPRODUCED IN ANY WAY UNLESS AUTHORIZED IN WRITING BY HURST BOILER AND WELDING CO., INC. AND MUST BE RETURNED UPON REQUEST

SCALE:	DWN. BY:	DATE:	CHK'D. BY:	DRAWING NO.:	R
NTS 24	JGF	11/14/01	JHO	4VT-_-10-150RB	.